
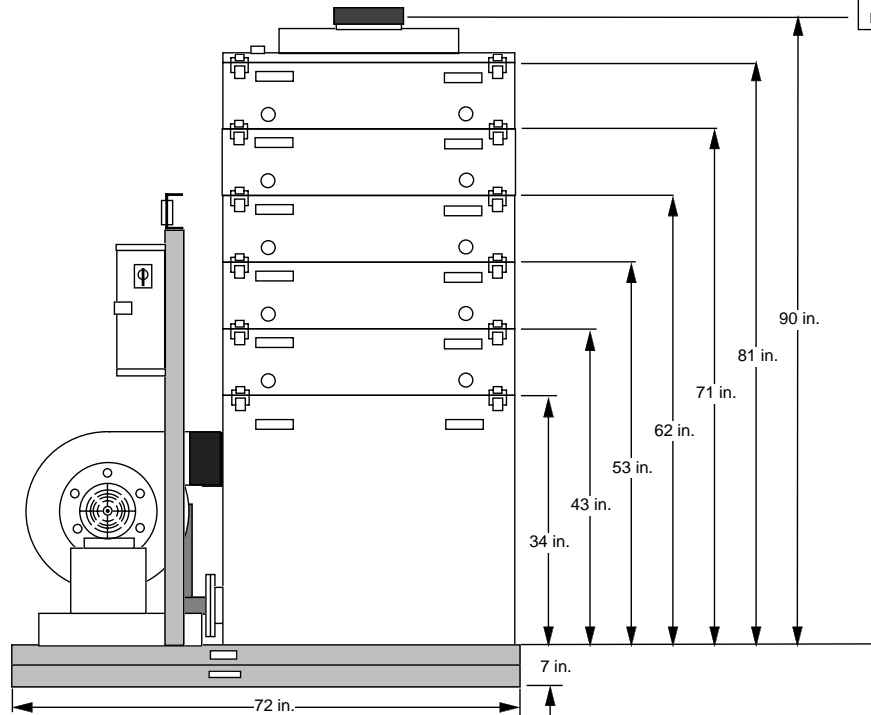


FRONT

RIGHT SIDE

MINIMUM CLEARANCE

FRONT	1.5 ft.
TOP	12 in.
REAR	N/A
LEFT	6.5 ft.
RIGHT	1 ft.

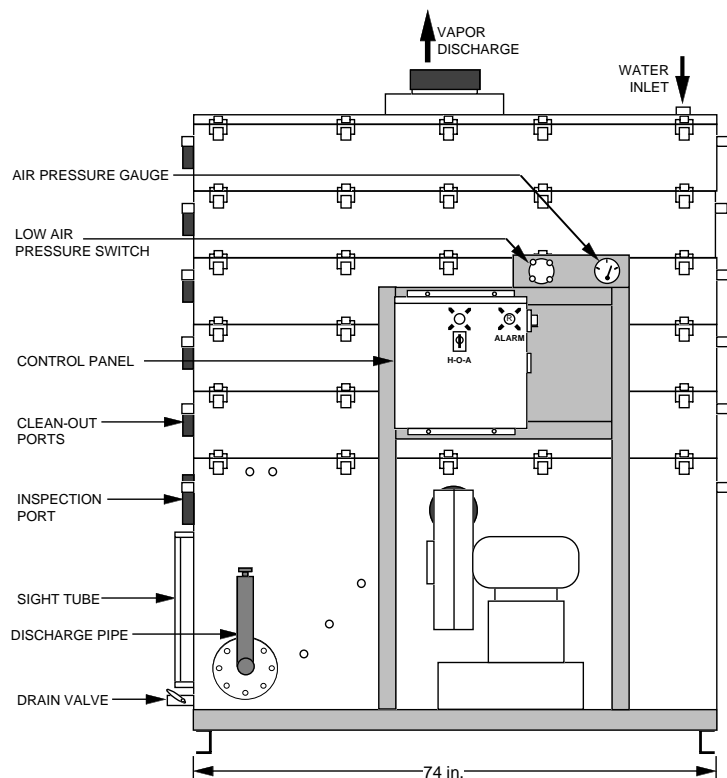

POWER: 3Ø, 230 Volt, 3 WIRE + GROUND, 60 Hz

BASIC SYSTEM

- ✓ SUMP TANK
- ✓ STRIPPER TRAYS
- ✓ BLOWER
- ✓ MIST ELIMINATOR
- ✓ PIPING
- ✓ SPRAY NOZZLE
- ✓ WATER LEVEL SIGHT TUBE
- ✓ GASKETS
- ✓ LATCHES

OPTIONAL ITEMS

- ✓ SKID & STANCHION
- ✓ AIR PRESSURE GAUGE
- ✓ GRAVITY DISCHARGE PIPING
- ___ DISCHARGE PUMP
- ___ FEED PUMP
- ___ ADDITIONAL BLOWER
- ___ EXPLOSION-PROOF MOTORS
- ___ LOCAL DISCONNECT NEMA 7
- ✓ CONTROL PANEL
- ✓ MAIN DISCONNECT SWITCH
- ___ I.S. COMPONENTS/REMOTE MOUNT
- ✓ INTERMITTENT OPERATION
- ___ STROBE LIGHT
- ___ ALARM HORN
- ___ POWER LAPSE INDICATOR
- ✓ AIR PRESSURE ALARM SWITCH(ES)
- ✓ HIGH WATER LEVEL ALARM SWITCH
- ___ DISCHARGE PUMP LEVEL SWITCH
- ___ WATER PRESSURE GAUGE(S)
- ___ DIGITAL WATER FLOW INDICATOR
- ___ AIR FLOW METER
- ___ TEMPERATURE GAUGE(S)
- ___ LINE SAMPLING PORTS
- ___ AIR BLOWER SILENCER
- ✓ WASHER WAND
- ___ AUTO DIALER

NOTE: THIS DRAWING IS REPRESENTATIVE OF A STANDARD SHALLOWTRAY CONFIGURATION, AND IS NOT INTENDED FOR ENGINEERING DESIGN OR LAYOUT. ACTUAL ARRANGEMENT AND DIMENSIONS MAY VARY DEPENDING ON BLOWER SELECTION OR OTHER ACCESSORIES. PLEASE CONTACT NEEP FOR DETAILED DESIGN INFORMATION.

CONSULT N.E.E.P. FOR AMPACITIES AND OTHER VOLTAGE OPTIONS

STRIPPER CONSTRUCTION:
304L STAINLESS STEEL

CONNECTION INFORMATION

ITEM	SIZE
DISCHARGE FLANGE	6"Ø 150# DRILLING
DISCHARGE PUMP	3"Ø FNPT
WATER INLET	3"Ø FNPT
AIR EXHAUST	10"Ø STUB W/10" CPLG

 **NORTH EAST ENVIRONMENTAL PRODUCTS, INC.**
7 COMMERCE AVENUE
WEST LEBANON, NEW HAMPSHIRE 03784
PHONE: 603-298-7061 FAX: 603-298-7063
<http://www.neepsystems.com>

TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 1 INCH _{ØYS}

DRAWING NAME: © 2002 NEEP
ShallowTray® Model 3651

DRAWING #: Proposal #Typical

DRAWN: DCS **CUSTOMER:** neepsystems.com

DATE: 03/20/03 **SCALE:** NTS **SIZE:** A **SHEET:** 1 OF 1